

IoT enabled Advanced Metering Infrastructure for Smart Cities with Hybrid Communication technology.

Mithilesh Kumar

L&T Smart World/Smart Utility Solutions, Delhi, India

mhkmr@lntecc.com

Abstract— Due to lack of situational awareness, real-time data availability and automated data analysis today's electric power grid has been ill-suited to the demand for electricity. Besides, the greenhouse gas emissions, the growing population, the capacity limitations of electricity generation, decrease in fossil fuels, and resilience problem have put more stress on the existing power grids. Modernizing of the electricity grid in Smart Cities has become utmost important and involve implementing an IoT enabled advanced metering infrastructure (AMI), which offers numerous advantages to the DISCOM's such as enhanced grid efficiency, remote monitoring, predictive maintenance, optimized load balancing and shedding, lower operational expenditure and increased transparency for the consumers. An integral part of the AMI for Smart Cities is the IoT enabled smart energy meters which can be installed for domestic and industrial purposes, automate the process of meter reading and assessment and seamlessly integrate with meter data management and billing related applications. A very common and yet critical problem today for the DISCOMs is to have 100% availability of billing related data for every consumer. Unavailability of a robust network communication infrastructure is the main cause. In this article, we propose Implementation of a hybrid two-way communication enabled meters will allow the electricity suppliers, users and technicians to remotely access and control the meters, enhancing convenience. Internet of Things (IoT) has led to the creation of advanced interconnected smart systems that were not possible in the past. An IoT based smart energy meter is proposed which is capable of two-way data communication supporting hybrid network communication infrastructure which can be over RF mesh or LPWAN or GSM based data communication based upon the network conditions of the installation area. The hybrid communication infrastructure will allow inclusion of international open protocols and universally adopted key enablers of smart grid. The IoT enabled AMI system will follow DLMS/COSEM which is widely accepted standard-based language for meter communication, having main goal of interoperability among metering equipment following data exchange models as per IS15959 part 2. The proposed system can be functional at almost any condition network environment and will measure the energy parameters in real time such as energy consumption, current (I), voltage (V) and power and will transmit data packets securely to cloud based head-end-system applications. The meter will also have theft and tamper detection capability which alerts utility or users through notifications. The proposed system will provide 100% accurate and reliable billing data of consumers and offers advantages over traditional smart energy metering solutions.

Index Terms— Smart meters, energy meter, IoT, DLMS/COSEM, Advanced Metering Infrastructure (AMI), Automatic Meter Reading (AMR), smart grid, electricity, theft detection, tampering, LPWAN, automation

I. INTRODUCTION

The Internet of Things (IoT) is a network of physical objects (referred to as "things" or "objects") that are integrated with sensors, applications, and other technology for the purpose of communicating and sharing data with other devices and systems over the Internet. Because of the integration of various technologies, such as real-time analytics, artificial learning, commodity sensors, and embedded systems, things have changed. The Internet of

Things is enabled by traditional fields such as embedded systems, wireless sensor networks, control systems, automation (including home and building automation), and others.

AMI (advanced metering infrastructure) refers to the entire infrastructure, which includes everything from smart meters to two-way communication networks, control centre facilities, and all the technologies that allow for the collection and transmission of energy consumption data in near real-time. AMI enables two-way connectivity with consumers and serves as the smart grid's backbone. Remote meter reading for error-free results, network issue detection, load profiling, energy audit, and partial load curtailment in lieu of load shedding are some of the goals of AMI. IoT based Smart energy meters are being built to simplify meter reading, error identification, billing, theft/tampering detection, and load balancing, among other things. These integrated smart devices provide suppliers with more information about consumption habits, peak use hours, and peak usage areas, helping them to increase the quality and availability of these services.

In contrast to automated meter reading (AMR), advanced metering technology (AMI) allows for two-way communication between the meter and the retailer. Cellular communications, wireless ad hoc networks like low power long-range wide area network (LoRaWAN) with high radio penetration rate, free, using the frequency 865-867 MHz are wireless connectivity solutions.

Through this paper, we propose a IoT enabled smart energy meter which is capable of transmitting meter data packets using two communication technologies i.e. one over GSM cellular technology and another over LoRaWAN based upon the geographical conditions and network availability in the region. The data packets from the smart meters will follow DLMS/COSEM standards and IS15959 guidelines. The smart meters can display various parameters through its in-built display as well as through an web based Head-end-System application software. The meter measures energy usage, current, voltage, power and provides the bill amount in real-time. An additional feature of this meter is theft and tamper detection which alerts the user of theft or tampering through the application software. This meter eliminates the need for manual checks for collecting meter data and transmit meter data automatically at an defined periodic intervals, which is further used for generating electricity bills.

II. LITERATURE REVIEW

GSM (global system for mobile communications) based smart energy meter systems eliminate the need for manual meter reading collection and provide an alternative to traditional energy meters. They can form part of AMR systems and transmit data over the GSM network to mobile devices. The smart energy meter utilizes a relay to cut off electricity supply remotely which can be used by electricity distributors. Further, the meter displays the necessary information on its in-built LCD in addition to transmitting it through GSM communication. The energy meters are largely limited network availability and to one-way communication and only connect-disconnect feature can be remotely carried out through two-way communication due to operation over GSM. The meter readings obtained are not in real-time as the data is transmitted to the user through short message service (SMS) which limits the frequency with which the data is updated. Additionally, the energy meter lacks crucial information such as current, voltage and power measurements. The process of adding more users or recipients of the energy meter data is also extremely cumbersome as it would require modifying the source code of the system due to the use of SMS for data transmission.

IoT based smart energy meters offer a better solution in comparison to only GSM enabled meters as they support fully functional two-way communication which forms an essential part of the AMI. The proposed system is capable of transmitting meter data over both GSM as well as LoRaWAN network infrastructure basis network availability in the given geographical conditions. The proposed network capability provides a fast and reliable connection. The meter can provide real-time information to its users through a application software and can detect energy consumption aswell as theft. However, the system developed does not utilize external sensors to detect tampering or theft but rather predicts the occurrence of theft using a current sensor which could sometimes lead to unreliable detection and false alarms. The data obtained by the meter is displayed on an in-built display which shows limited information due to its small size. The IoT based smart energy meter system created in allows real-time two-way communication and measures the energy consumption.

The GSM based smart energy meter designed is limited by the use of GSM for communication due to which the data is sent over SMS and hence the information obtained is not real-time, but rather, sent to the user at the end of every month. The smart meter has a warning system that sends SMS alerts to the user when they are about to reach a pre-defined energy consumption limit. The in-built LCD can display useful information during physical meter evaluation. However, the system does not measure numerous important parameters and lacks safety features such as theft detection leaving it susceptible to electricity theft.

Improving on IoT based smart energy meter designs, the smart energy meter proposed can transmit data real-time through a hybrid communication solution to the web based application for data processing and billing management. It support two-way communication for specific user commands for meter connection/disconnection or specific use cases. The IoT based smart meter ensure theft and tampering detection through real-time alerts and is highly secured to external manipulation. Further, the meter measures various parameters such as power, energy, active power, reactive power and power factor and transmit the parameters on real time to head end application software.

III. OBJECTIVES

This solution focuses on development of smart meters with hybrid communication set-up having two-way data - communication capability. The IoT based smart energy meter that can also be implemented at a low cost. The main objectives of this project are:

- Ensure near 100%-meter data communication under various network scenarios
- Measure energy parameters, current, voltage and power as per DLMS standards
- Display real-time parameters in application software.
- Generate bill amount available to the user based on a set price for each unit of electricity consumed.
- Alert users in case of theft or tampering of the energy meter.

IV. METHODOLOGY

A. Proposed System

The proposed system will remove the need to manually survey the energy meter to collect readings or to view the status of the meter. Additional functions can be added to the system by incorporating the necessary modules as per the needs of the user or electricity supplier. Fig. 1 shows a diagram of the proposed system.




Fig. 1. Block Diagram of the proposed system

The main components of the proposed system include:

- Smart electricity meters – Smart meter is an a.c. static transformer operated watt-hour and Var-hour meter with time of use registers and two-way communication capabilities. It is designed to measure ‘forwarded only’ or ‘import and export’ energy, store and communicate the same along with other parameters defined in DLMS standards. It shall be remotely accessed for collecting data/events, programming for selected parameters.

The smart meter support the following features/services:

- *Smart meter association requirements,*
- *Push services,*
- *Advanced security profile,*
- *Communication profile,*
- *Firmware upgrade,*
- *Connect/disconnect services, and*
- *Parameter list for smart meters.*
- Date Exchange protocol – The data exchange protocol for Smart Meter shall be as per IS 15959 (Part 3) including specific requirements for Smart Meters for the application layer. This application layer protocol which is primarily DLMS/COSEM shall work through the other layers.
- GSM Communication Technology - In the GSM communication setup, A GSM module which is a circuit or chip is used to establish communication using wireless communication technology. The GSM module enables the transmission of meter data to the receiver. The GSM module is used in the design to transmit (send) the amount of power consumed to the utility company and the consumer. It operates on a +5-voltage power supply.
- LoRaWAN Communication Technology – LoRa is the wireless modulation technology utilized to create the long-range communication link. LoRa is based on chirp spread spectrum modulation, which maintains the same low power characteristics as FSK modulation but significantly increases the communication range. LoRaWAN defines the communication protocol and system architecture for the network. A single gateway or base station can cover entire cities or hundreds of square kilometres.
- LoRaWAN Network Architecture -In LoRaWAN, network nodes are not associated with a specific gateway. Instead, data transmitted by a node is typically received by multiple gateways. Each gateway will forward the received packet from the end-node to the cloud-based network server via some backhaul (either cellular, Ethernet, satellite, or Wi-Fi). The intelligence and complexity is pushed to the network server, which manages the network and will filter redundant received packets, perform security checks, schedule acknowledgments through the optimal gateway, and perform adaptive data rate, etc.

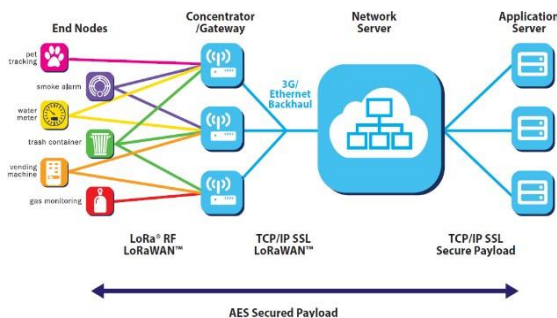


Fig. 2. Network Architecture of LoRaWAN

- LoRaWAN Security - The LoRaWAN protocol's

baseline authentication and security framework draw from the AES 128 encryption scheme as implemented by IEEE 802.15.4/2006 Annex B [IEEE802154]. In atypical smart deployment, separate keys are used for user data encryption and authentication/network integrity.

- LoRaWAN Network Capacity – LoRaWAN support High network capacity. It is achieved by utilizing adaptive data rate and by using a multichannel multi-modem transceiver in the gateway so that simultaneous messages on multiple channels can be received. The critical factors effecting capacity are the number of concurrent channels, data rate (time on air), the payload length, and how often nodes transmit. Since LoRa is a spread spectrum-based modulation, the signals are practically orthogonal to each other when different spreading factors are utilized. As the spreading factor changes, the effective data rate also changes. The gateway takes advantage of this property by being able to receive multiple different data rates on the same channel at the same time.
- Application Software – This entity is called Head end System (HES) and is situated at the top of AMI system and receives data and events over GSM or LoRaWAN. It is responsible for using these data and manage network components and smart meters. HES is also responsible for handling security keys, passwords intended for smart meter programmability and firmware upgrade and host applications such as remote connect/disconnect, analytics, billing, and messaging. HES acquire meter data automatically, avoiding any human intervention, and monitor parameters acquired from meters. HES manage the connectivity and schedule the collection of data from the metering infrastructure including both the meter devices and communication. It also enables secure access to meters for configuration, software updates and ad-hoc requests

B. Implementation

The diagram below showcases the data communication journey from Smart electricity meter (IS16444, DLMS/COSEM Compliant) with pre-integrated GSM and LoRaWAN module to the Head end system application software over LoRaWAN network communication technology.

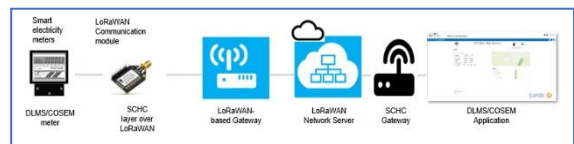


Fig. 3. Implementation diagram of AMI over LoRaWAN

- On LoRaWAN, As depicted from the diagram above the smart meter generate data packets for various DLMS parameters (Instantaneous, Load profile etc.,) in an given periodic interval. The data packets generated by the device are compressed and fragmented using SCHC technology – Static Context Header Technology at the LoRa module. The data packets are transported in IPV6/UDP packet format. The fragmented data packets are transmitted over LoRaWAN and relay the data into the centralized

LoRa network server.

The fragmented data packets from the network server are pushed to the SCHC Gateway using API services. At SCHC gateway, every fragmented data packet is reconstructed to create the single complete DLMS parameter packet. The SCHC Gateway push the complete DLMS parameter data packet the Head End System Application software which in turn produce necessary dashboard, KPIs and reports as applicable.

V. RESULTS AND DISCUSSION

The IoT based smart energy meter system executed all the functions reliably and measured and displayed the parameters such as current, voltage, power and energy consumption successfully.

Date/ID	Timestamp	Frequency	Current(A)	Voltage(V)	Powerfactor(PF)	kWh/Wh
0056A32601F0E28	2020-03-07 01:42:45	50	0.01010	240.000	0.910	0.010
0056A32601F0E28	2020-03-07 01:43:14	49.8	0.01010	240.000	0.910	0.010
0056A32601F0E28	2020-03-07 01:37:46	49.8	0.01010	240.000	0.910	0.010
0056A32601F0E28	2020-03-07 01:38:57	49.8	0.01010	240.000	0.910	0.010
0056A32601F0E28	2020-03-07 01:32:33	50	0.01010	240.000	0.910	0.010
0056A32601F0E28	2020-03-07 01:30:00	50.1	0.011010	241.000	0.910	0.010
0056A32601F0E28	2020-03-07 01:24:54	50	0.01010	240.000	0.910	0.010
0056A32601F0E28	2020-03-07 01:22:22	49.8	0.01010	239.900	0.910	0.010
0056A32601F0E28	2020-03-07 01:19:46	49.8	0.01010	239.800	0.910	0.010
0056A32601F0E28	2020-03-07 01:17:16	49.8	0.01010	239.900	0.910	0.010

Fig. 4. Smart Meter data on Head End System

Table II concludes the comparison between existing smart energy meters and the smart energy meter proposed. It can be confirmed through an analysis of the table, that the proposed smart energy meter offers many advantages in comparison to existing smart meters while being less expensive and more accurate.

TABLE II: COMPARISON BETWEEN EXISTING SMART ENERGY METERS AND PROPOSED IOT BASED SMART ENERGY METER

Parameter	Existing Smart Energy Meters	Proposed IoT based Smart Energy Meter
Energy consumption reading and bill generation	Yes	Yes
Remote access and configuration	Yes	Yes
Measurement of parameters such as current, voltage, power and theft detection	No	Yes
Two-way communication support	Yes	Yes
User device notifications and app alerts	No	Yes
Accuracy	≥99.0%	≥99.5%
Cost	Rs. 4000 - Rs 8000	Approximately Rs. 3300

VI. CONCLUSION

This project aims to create a cost-effective, accurate and reliable smart energy meter that can be integrated within the advanced metering infrastructure (AMI). The IoT based smart energy meter is capable of two-way communication through LoRaWAN with the data being available in real-time. The developed system measures

numerous parameters such as current, voltage, power, and energy consumption, and generates a bill based on the energy consumption and price per unit of electricity. The smart meter ensures security through theft and tamper detection system that prevents manipulation, misuse and theft of electricity. The smart energy meter comes with a compact and secure design that can be enclosed with an external casing to enhance safety and aesthetics. The meter's robust and simple components ensure long-term durability and reliability which is essential for its real-life deployment.

To scale with long-term interoperability and benefit from the great disruption of the Internet of Things, utilities are demanding open-standard connectivity technologies allowing the choice between several network models (public/private/hybrid). Utilities also need cost-effective, robust, reliable, perennial, secure, easy-to-install wireless technology to support their businesses' digital transformation, along with those of their partners and customers in the long term.

Embracing AMI and implementing smart energy meters throughout India's electricity grid will offer innumerable advantages and modernize India's grid. The implementation of smart meters will enhance transparency, prevent theft, increase grid efficiency and allow the electricity supplier to perform functions such as load balancing and shedding by analyzing the energy consumption patterns of the consumers. This would make energy more readily available, prevent wastage of energy and reduce costs for the consumers. One of the biggest advantages offered by smart energy meters is the elimination of manual meter reading and status check which will save time and resources.

REFERENCES

- [1] M. M. Rahman, Noor-E-Jannat, M. O. Islam and M. S. Salakin, "Arduino and GSM based smart energy meter for advanced metering and billing system," in *2015 International Conference on Electrical Engineering and Information Communication Technology (ICEEICT)*, 2015, pp. 1-6. doi:10.1109/ICEEICT.2015.7307498
- [2] B. K. Barman, S. N. Yadav, S. Kumar and S. Gope, "IOT Based Smart Energy Meter for Efficient Energy Utilization in SmartGrid," in *2018 2nd International Conference on Power, Energy and Environment: Towards Smart Technology (ICEPE)*, 2018, pp. 1-5. doi:10.1109/EPETSG.2018.8658501
- [3] B. Sahani, T. Ravi, and R. Pisal, "IoT Based Smart Energy Meter," *International Research Journal of Engineering and Technology (IRJET)*, vol. 4, no. 4, pp. 96-102, April 2017.
- [4] P. Loganthurai, M. Shalini, A. Vanmathi, M. Veeralakshmi and V. Vivitha, "Smart energy meter billing using GSM with warning system," in *2017 IEEE International Conference on Intelligent Techniques in Control, Optimization and Signal Processing (INCOS)*, 2017, pp. 1-4. doi:10.1109/ITCOSP.2017.8303087
- [5] H. K. Patel, T. Mody and A. Goyal, "Arduino Based Smart Energy Meter using GSM," in *2019 4th International Conference on Internet of Things: Smart Innovation and Usages (IoT-SIU)*, 2019, pp. 1-6. doi:10.1109/IoT-SIU.2019.8777490
- [6] S. Saha, S. Mondal, A. Saha and P. Purkait, "Design and Implementation of IoT Based Smart Energy Meter," in *2018 IEEE Applied Signal Processing Conference (ASPCON)*, 2018, pp. 19-23. doi:10.1109/ASPCON.2018.8748696

- [7] A. L. Vergara and H. M. Villaruz, "Development of an Arduino-based automated household utility power monitoring system," in 2014 International Conference on Humanoid, Nanotechnology,

Information Technology, Communication and Control, Environment and Management (HNICEM), 2014, pp. 1-6. doi:10.1109/HNICEM.2014.7016233

- [8] R. Pereira, J. Figueiredo, R. Melicio, V. Mendes, J. Martins and J. Quadrado, "Consumer energy management system with integration of smart meters," *Energy Reports*, vol. 1, pp. 22-29, November 2015. doi:10.1016/j.egy.2014.10.001
- [9] S. Muralidhara, N. Hegde and R. PM, "An internet of things-based smart energy meter for monitoring device-level consumption of energy," *Computers & Electrical Engineering*, vol. 87, p. 106772, October 2020. doi: 10.1016/j.compeleceng.2020.106772
- [10] P. Kanakaraja, S. Upadhyay, S. Kotamraju, G. Venkata Sai Suneela and R. Neelesh, "Design and Implementation of Smart Energy Meter using LoRa-WAN and IoT Applications," *Journal of Physics: Conference Series*, vol. 1804, no. 1, p. 012207, 2021. doi:10.1088/1742-6596/1804/1/012207
- [11] H. Nawale, A. Kharde, S. Varpe, S. Shinde and M. Kanwade, "GSM Based Automatic Energy Meter Reading Using Smart Energy Meter," *International Journal of Research in Engineering, Science and Management*, vol. 3, no. 2, pp. 404-407, February 2020.